


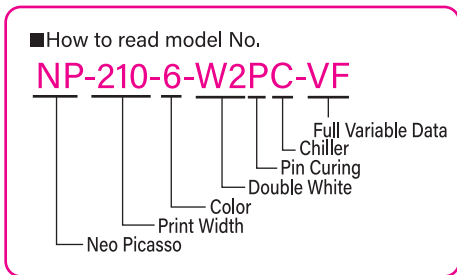
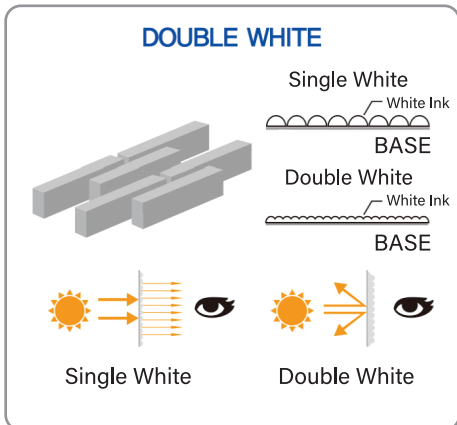


NEOPICASSO PLUS

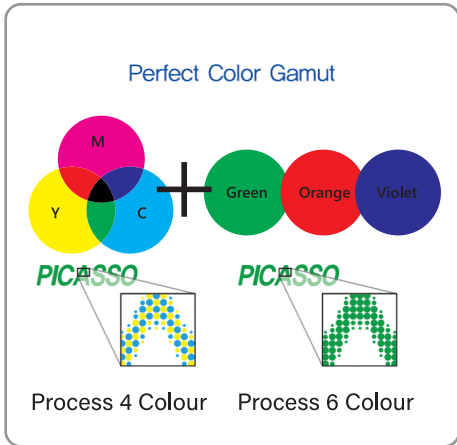

Precise Web Guide
Perfect balance on both sides enables perfect printing quality



Web cleaning and Ionization
Prevent the static electricity on media. Web cleaner for removing all tiny dust on the surface in one-line system



Curing System
UV lamp / LED
Complete curing of UV ink on both inside and outside with great efficiency



Corona Treatment
Pre-treatment of media with powerful 5KW capacity




Tension Control
Automatic setting of media tension by weighing the media weights



Rewinder / Unwinder
Stably wind up media, No need for specific after-processing

Model	NP-210-6-W2PC-VF	NP-350-6-W2PC-VF
Printing Technology	DOD(Drop-on-Demand) Piezoelectric Technology	
Number of Print Head	16 Heads[2558 nozzle]	24 Heads[2558 nozzle]
Print Type	Roll to Roll	
Print Width	220 mm	330 mm
Print Speed	50m/min[Max]	
Print Resolution	600 x 1,200 dpi[Max]	
Media Treatment	Corona system / Ionization system / Web cleaning system / Chiller (Option)	
Ink Type	UV based pigment	
Color	C, M, Y, K, Green, Orange, Violet + 2 White	
Grayscale	4 grayscale (0, 3, 6, 13 pl)	
Variable Data Printing	Full Color Variable or sequential numbering, variable text, barcodes, QR codes	
Substrate type	Coated & uncoated paper, PVC, PP, PE and label stock, aluminum foil etc.	
Control panel	Touch screen with swing arm mounted	
Input Voltage	3Phase 380VAC±10%, 50/60Hz or 3 Phase 240VAC±10%, 50/60Hz	
Weight	About 4,500kg	About 5,000kg

Dimensions[LxWxH]

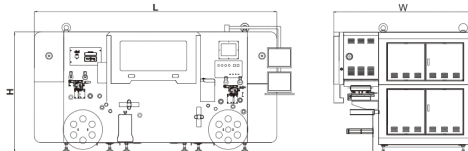

(L)5,130mm x (W)2,220mm x (H)2,000mm



HUA FAR IMPORT EXPORT LIMITED PARTNERSHIP

18 Soi 40, Phuttabucha road, Tungkr, Bangkok, Thailand 10140

Tel : +66 (0)2 4264440-2 Fax : (0)2 4264430

Mobile : +66 (0)6 16599700 Line@ : @huafar

Website : www.huafar-digital.com

